
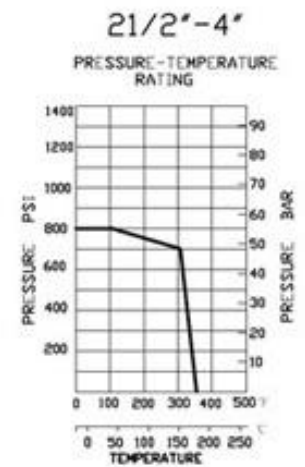
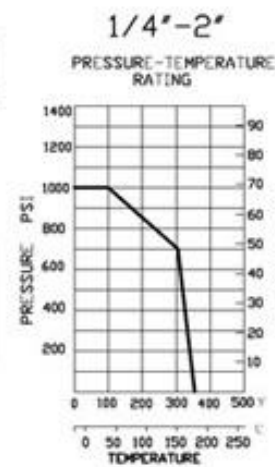


Zawór kulowy trzyczęściowy gwintowany

Zawór kulowy, trzyczęściowy, przełot pełny, końcówki z gwintami wewnętrznymi. Uszczelnienie teflonowe (PTFE). Ciśnienie robocze do 65 Bar. Temperatura pracy od -20 stopni do 200 stopni Celsjusza. Wykonany ze stali 316. Dostępny z atestem EN 10204 3.1

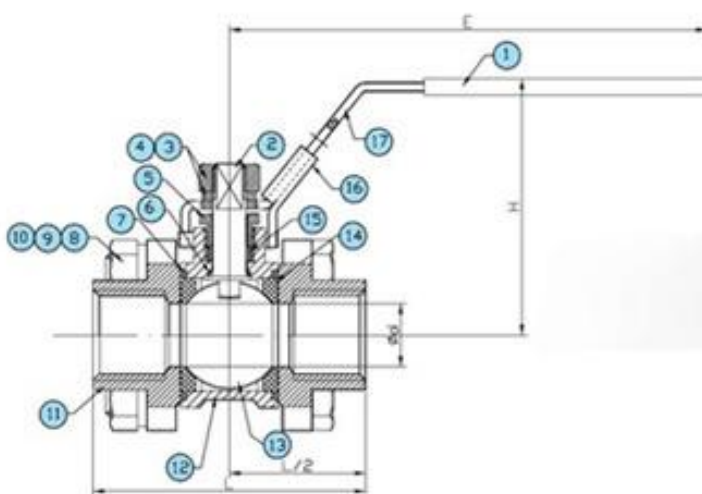

ITEM SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
d	11.6	12.5	15	20	25	32	38	50	65	76	100
L	61	61	63	72	82.5	97.5	108.5	124	162	175	216
H	49	49	57	62	72	78	91	102	122	132	177
W	103	103	108	108	129	129	160	160	230	230	335

MATERIAL LIST

ITEM	DESIGNATION	MATERIAL
1	HANDLE COVER	PLASTIC
2	STEM	SUS304/316
3	HAND WASHER	SUS304
4	HAND NUT	SUS304
5	GLAND	SUS304
6	THRUST WASHER	PTFE
7	END SEAL	PTFE
8	BOLT	SUS304
9	BOLT NUT	SUS304
10	BOLT WASHER	SUS304
11	END CAP	CF8/CF8M
12	BODY	CF8/CF8M
13	BALL	CF8/CF8M
14	BALL SEAT	PTFE
15	STEM PACKING	PTFE
16	LOCK DEVICE	SUS304
17	HANDLE	SUS304